

Rugged, lightweight and powerful construction designed for light to medium duty operation. They excel at curb and sidewalk demolition, asphalt cutting and are popular for ground rod driving with electric utilities. Feather on/off valve allows the operator to control the output energy of the tool through the full range from 0 to 1525 blows per minute, making startup and initial placement easy. Diaphragm type accumulator design provides for ease of maintenance and extended service life of the tool. Operates at a maximum back pressure of 250 psi (17 bar) on open center systems.

FEATURES

- Reduces Operator Fatigue
- Increases Productivity
- Handles Tough Applications
- Easy Operator Control
- Easy Maintenance
- Secure Locking Mounting Mechanism



Breaker
#08-000-10



3in x 14in Long Chisel #08-410-03




14in Moil Point #08-410-02



5in x 11in Asphalt Cutter #08-410-01

SPECIFICATIONS

DESCRIPTION	US	METRIC
Output	0-1525 Blows Per Minute	1890 lpm
Input Flow Range	7-9 gpm	26-34 lpm
Input Pressure	1500-2000 psi	105-140 bar
Max Back Pressure	250 psi	17 bar
Optimum flow	8 gpm	30 lpm
Porting	-8 SAE O-Ring	
Connector	3/8in Male Pipe Head Hose End	
Steel Capacity	4-1/4 x 1 in Hex*, 6x 1-1/8in Hex, & 6x1-1/4in Hex	
Weight	45/51 lb	20/23 kg
Length	25 in	65 cm
Width (at handles)	14/17.5 in	35/45cm

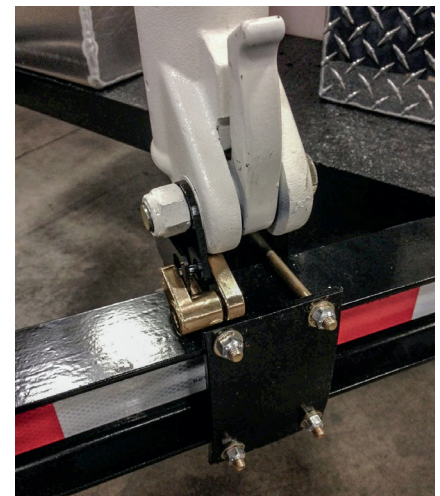

Breaker Mount & Lock #08-405-00